

OPT1-FA/FU-Series Operation terminal for TCX2, TCI2 and SxC2 controller

Features

Remote access to controller state, set points, inputs and outputs

- Resistive touch display with white backlit LCD
- Access to time schedule and clock settings
- Access to configuration parameters
- RS485 peer to peer communication according to proprietary protocol of Vector Controls GmbH
- The terminal adapts itself to the TCX2, TCI2 and SxC2 controller used. One terminal thus fits all the configuration variations of the TCX2, TCI2 and SxC2 product range.
- Internal temperature and –H version humidity sensor
- 1 passive input and 1 voltage input
- By using different frames and mounting plate, it is possible to mount this device to most of the existing flush mounted electrical connection boxes

Applications

- Configuration and operation of TCX2, TCI2 and SxC2 controllers
- Remote supervision (RS485)

General description

The OPT1-Fx-(H)TNV-VC is a remote display and operation terminal for TCX2, TCI2 and SxC2 series controllers.

Types and Ordering

Product name	Product No.	Description/option
OPT1-FA-TNV-VC	40-50-0136	Operation terminal for TCX2, TCI2 and SxC2 controller with peer-to-peer RS485 communication and 1 internal temperature sensor, 1 external passive and 1 voltage input with AMM-AD-W package (square frame and mounting plate)
OPT1-FA-HTNV-VC	40-50-0135	Operation terminal for TCX2, TCI2 and SxC2 controller with peer-to-peer RS485 communication and 1 internal temperature and humidity sensor, 1 external passive and 1 voltage input with AMM-AD-W package (square frame and mounting plate)
OPT1-FU-TNV-VC	40-50-0116	Operation terminal for TCX2, TCI2 and SxC2 controller with peer-to-peer RS485 communication and 1 internal temperature sensor, 1 external passive and 1 voltage input with AMM-UD-W package (rectangular frame and mounting plate)
OPT1-FU-HTNV-VC	40-50-0137	Operation terminal for TCX2, TCI2 and SxC2 controller with peer-to-peer RS485 communication and 1 internal temperature and humidity sensor, 1 external passive and 1 voltage input with AMM-UD-W package (rectangular frame and mounting plate)
<i>Accessories</i>		
AMM-AD-W	40-51-0089	Frame and mounting plate for square connection box
AMM-UD-W	40-51-0090	Frame and mounting plate for rectangular connection box
AES4-HT-A2	40-50-0153	Sensor element accuracy RH \pm 2 %, temperature \pm 0.3 °C
AES4-HT-A3	40-50-0152	Sensor element accuracy RH \pm 3 %, temperature \pm 0.4 °C

Safety



DANGER! Safety advice

This device is for use as operating controls. It is not a safety device! Where a device failure endangers human life and/or property, it is the responsibility of the client, installer and system designer to add additional safety devices to prevent a system failure caused by such a device failure. Ignoring specifications and local regulations may cause equipment damage and endangers life and property. Tampering with the device and misapplication will void warranty.



OPT1-FU-



OPT1-FA-

Technical specification

Power supply	Operating voltage	12-30 VDC
	Power consumption	Max. 1 VA
	Electrical connection	Terminal connectors, wire 0.34...2.5 mm ² (AWG 24...12)
Inputs	Temperature sensor	NTC 10kΩ @ 25 °C (77°F)
	Accuracy	0...50 °C (32...122 °F): 0.5 K
	Humidity sensor:	Capacitive sensor
	Measuring accuracy	See figure 1 below
	Hysteresis	± 1%
	Repeatability	± 0.1%
	Stability	< 0.5% / year
Passive inputs	Range	X1-NTC NTC 10kΩ@25 °C (77 °F) or open contact to M
	Analog input	X2-VDC
Communication	Range	0...10 VDC
	Resolution	39 mV
	Impedance	98 kΩ
	Communication type	RS485, peer to peer, VCP: Vector Controls Proprietary Protocol
Environment	Protocol	Shielded Twisted Pair (STP) balanced 100 to 130 ohm
	Cabling acc. to EIA-485	<100 pF/m 30 pF/ft. or lower
	Impedance	65% or higher
	Nominal capacitance	1200 m (4000 ft)
	Nominal velocity	
Standards	Maximum length	
	Operation	To IEC 721-3-3 class 3 K5
	Climatic conditions	
	Temperature	0...50 °C (32...122 °F)
	Humidity	<95 % RH non-condensing
	Transport & storage	To IEC 721-3-2 and IEC 721-3-1 class 3 K3 and class 1 K3
General	Climatic conditions	-25...75 °C (-13...167 °F)
	Temperature	<95 % RH non-condensing
	Humidity	class 2M2
	Mechanical conditions	
	Product standards	conform according to EMC Standard 89/336/EEC EN 61 000-6-1/ EN 61 000-6-3 EMEI Standard 73/23/EEC
	Automatic electrical controls for household and similar use	EN 60 730 -1
	Special requirement on temperature dependent controls	EN 60 730 - 2 - 9
	Pollution class	Normal acc. to EN 60 730
	Degree of protection	IP30 to EN 60 529
	Safety class	III
General	Housing material:	Fire proof PC + ABS plastic (UL94 class V-0)
	Dimensions (H x W x D)	Front part: 60 x 60 x 13 mm (2.4" x 2.4" x 0.5") Power case: 50 x 50 x 31 mm (2.0" x 2.0" x 1.2") AMM-AD-W/OPT1-FA-: 88 x 88 x 8 mm (3.5" x 3.5" x 0.3") AMM-ED-W/OPT1-FU-: 72 x 113 x 8 mm (2.8" x 4.4" x 0.3")
	Weight (incl. packaging)	OPT1-F-: 105 g (3.7 oz) OPT1-FA / OPT1-FU-: 120 g (4.2 oz)

Accuracy of relative humidity sensor (RH)

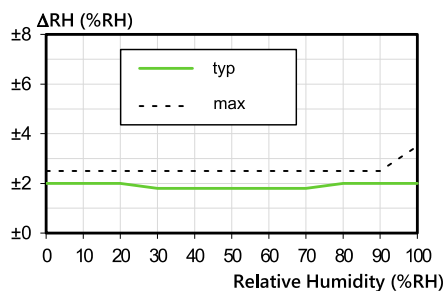
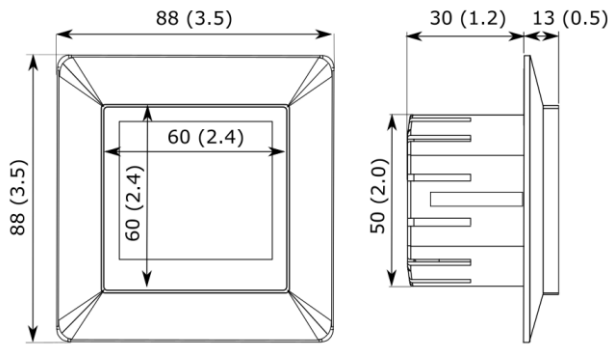
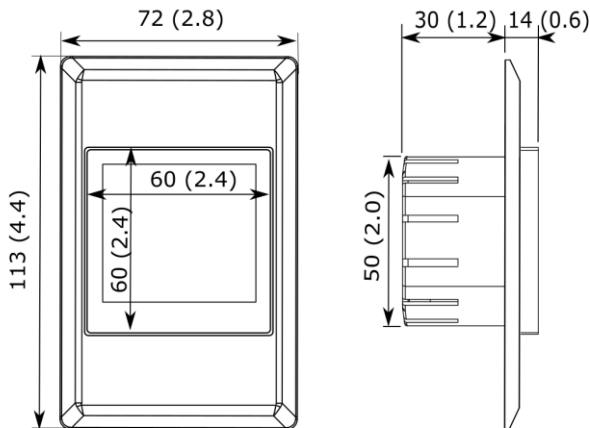



Figure 1: Typical and maximal RH-Accuracy at 25°C (77°F)

Dimensions OPT1-FA mm (in)

Dimensions OPT1-FU mm (in)

Mounting and Installation instructions


For details see "OPT1-FA/FU-(H)TNV-VC" install sheet, no. 70-00-0722 or "OPT1-FU-(H)TNV-VC" install sheet, no. 70-00-0714 on our website www.vectorcontrols.com.

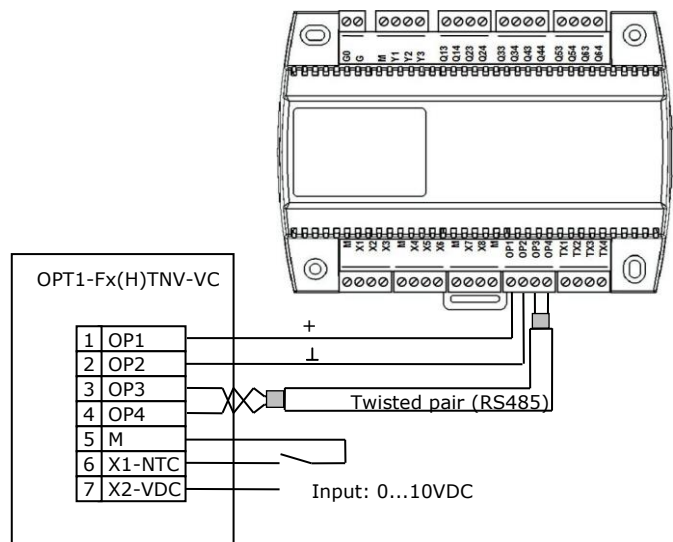Connection diagram
Description

- OP1-OP4** Connection to TCX2, TCI2 and Sx2 controller via RS485
- M** Common for potential free contacts
- X1-NTC** Passive input:
NTC 10kΩ@25 °C (77 °F) or
dry contact: open 100%, close 0%
- X2-VDC** Voltage input:
Voltage input for active sensor 0...10VDC


Display and Operation


For information on how to operate the terminal see document "X2 operations manual touch displays", no. 70-00-0951 on our website www.vectorcontrols.com.



More detailed information on the X2 functions can be found in the "X2 Engineering Manual" document no. 70-00-0737 on our website www.vectorcontrols.com.

Smart Sensors and Controls Made Easy!

Quality - Innovation – Partnership

Vector Controls GmbH
Switzerland

info@vectorcontrols.com
www.vectorcontrols.com/

