



Universal Programmable Controller TCX2

The TCX2 is a programmable universal controller with communication capabilities. Each control loop may use 2 PI sequences and 6 binary stages. The TCX2 comes with a built in RS485 communication interface that allows peer-to-peer communication with an operation terminal such as OPA2-(2TH)-VC. Complete parameter sets may be copied by use of an accessory called AEC-PM1 or exchanged with a PC using an RS485-USB converter and the Easyset program. The TCX2 uses the universal X2-operating system.

Applications

- Refrigeration / air conditioning units
- Air handling units
- Chillers
- Humidifying / dehumidifying
- Pressure / pump systems
- and many more...

Functions

- 4 universally configurable control loops:
 - Functions for dehumidifying, set point shift and cascade control
 - Multiple auxiliary functions: heat-cool auto changeover, automatic enable, set point compensation
 - Free heating and cooling with economizer function based on enthalpy or temperature
 - Differential, averaging, min and max functions, enthalpy and dew point calculations
 - Transmitter function for inputs and set points
- 8 selectable universal inputs (VDC, mA, NTC)
- 3 universal analog outputs (VDC, mA) and 6 relays with each a normally open contact
- 8 freely assigned alarm conditions, selectable state of outputs on alarm condition
- Power cap protected real-time clock with 48hr power backup
- 7-day programmable schedules, with options including change of set points and direct position of manual outputs
- Password protected programmable user and control parameters

Ordering

Model	Item	Loop	UI	DO	AO	Functions
TCX2-40863	40-110032	4	8	6 Relays	3	Universal controller standalone
TCX2-40863-OP	40-110036	4	8	6 Relays	3	Controller with display standalone
AEC-PM1	40-500016					Plug-In memory module
AEX-MOD	40-500013					Modbus RTU or ASCII communication
AEX-BAC	40-500044					BACnet® MS/TP communication
AMM-1	40-510022					Accessory for cabinet door mounting


A large range of remote operation terminals may be found on our website. All -VC operation terminals work with this controller.

Technical specifications

Important notice and safety advice

This device is for use as an operating controller. It is not a safety device. Where a device failure could endanger human life and property, it is the responsibility of the client, installer and system designer to add additional safety devices to prevent such a device failure. Ignoring specifications and local regulations may cause equipment damage and endangers life and property. Tampering with the device and misapplication will void warranty.

Power supply	Power requirements	24 VAC ±10%, 50/60 Hz, 15..34 VDC SELV to HD 384, class II, 48VA max	
	Power consumption	Max. 10 VA	
	Electrical connection	Removable terminal connectors, wire 0.34...2.5 mm ² (AWG 24...12)	
	Clock backup	Min. 48 hours	
Signal inputs	Universal input	Input jumper set for voltage or current	
	Input signal	0...10 V or 0...20 mA	
	Resolution	9.76 mV or 0.019 mA (10 bit)	
	Impedance	Voltage: 98kΩ Current: 250Ω	
	Passive input	Input jumper set to temperature (RT) or digital input (DI)	
Signal outputs	Type:	NTC (Sxx-Tn10) 10kΩ, Type 2	
	Range	-40...100 °C (-40...212 °F)	
	Analogue outputs:	Output signal	
	Resolution	DC 0...10 V or 0...20 mA	
	Maximum load	9.76 mV or 0.019 mA (10 bit) Voltage: ≥1kΩ Current: ≤250Ω	
Relay outputs:	AC Voltage	0...250 VAC, full-load current 3A, locked-rotor 18A	
	DC Voltage	0...30 VDC, full-load current 3A, locked-rotor 18A	
Insulation strength between relays contacts and system electronics:		4000V AC to EN 60 730-1	
between neighbouring contacts:		1250V AC to EN 60 730-1	
Connection to remote terminal	Hardware interface	RS485 in accordance with EIA/TIA 485	
	Cabling	Twisted pair cable	
Environment	Operation	To IEC 721-3-3	
	Climatic conditions	class 3K5	
	Temperature	0...50 °C (32...122 °F)	
	Humidity	<85 % RH non-condensing	
	Transport & storage	To IEC 721-3-2 and IEC 721-3-1	
	Climatic conditions	class 3K3 and class 1K3	
	Temperature	-25...70 °C (-13...158 °F)	
Humidity	<95 % RH non-condensing		
Standards		conformity	2004/108/EC
		EMC directive	2006/95/EC
	Low voltage directive		
	Product standards		
	Automatic electrical controls for household and similar use	EN 60 730 -1	
	Special requirement on temperature dependent controls	EN 60 730 - 2 - 9	
	Electromagnetic compatibility for industrial and domestic sector	Emissions: EN 60 730-1	Immunity: EN 60 730-1
	Degree of protection	IP00 to EN 60 529	
	Pollution class	II (EN 60 730-1)	
	Safety class: Local regulations must be observed!	III (IEC 60536) if SELV is connected to DO II (IEC 60536) if line voltage is connected to DO.	
	Overvoltage category	III (EN 60 730-1)	
		Product standards:	
		Temperature- indicating and -regulating equipment	UL 873
Mark: c(ETL)us		CSA C22.2 No. 24 Certified by Intertek: 4005917	
General	Material	Fire proof ABS plastic (UL94 class V-0)	
	Dimensions (H x W x D)	56 x 147 x 115 mm (2.3 x 5.8 x 4.5 in)	
	Weight (including package)	TCX2-40863: 430g (15.2 oz) TCX2-40863-OP: 490g (17.3 oz)	

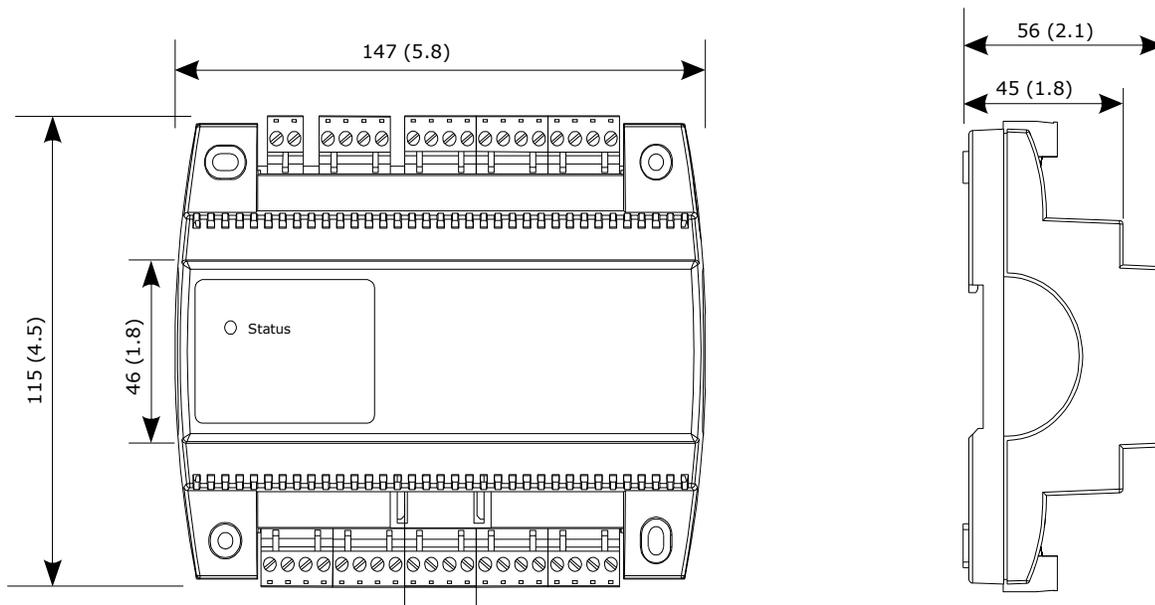Dimensions, mm (inch)**Selection of actuators and sensors****Temperature sensors**

Use Vector Controls NTC sensors to achieve maximum accuracy: SDB-Tn10-20 (duct), SRA-Tn10 (room), SDB-Tn10-20 + AMI-S10 as immersion sensor.

Actuators


Choose modulating actuators with an input signal type of 0-10 V DC or 4-20 mA (Min. and max. signal limitations may be set with parameters).

3-point actuators with constant running time are recommended.

Binary auxiliary devices (e.g. pumps, fans, on/off valves, humidifiers, etc.)

Do not directly connect devices that exceed specified limits in technical specifications – observe startup current on inductive loads.

Connection diagram

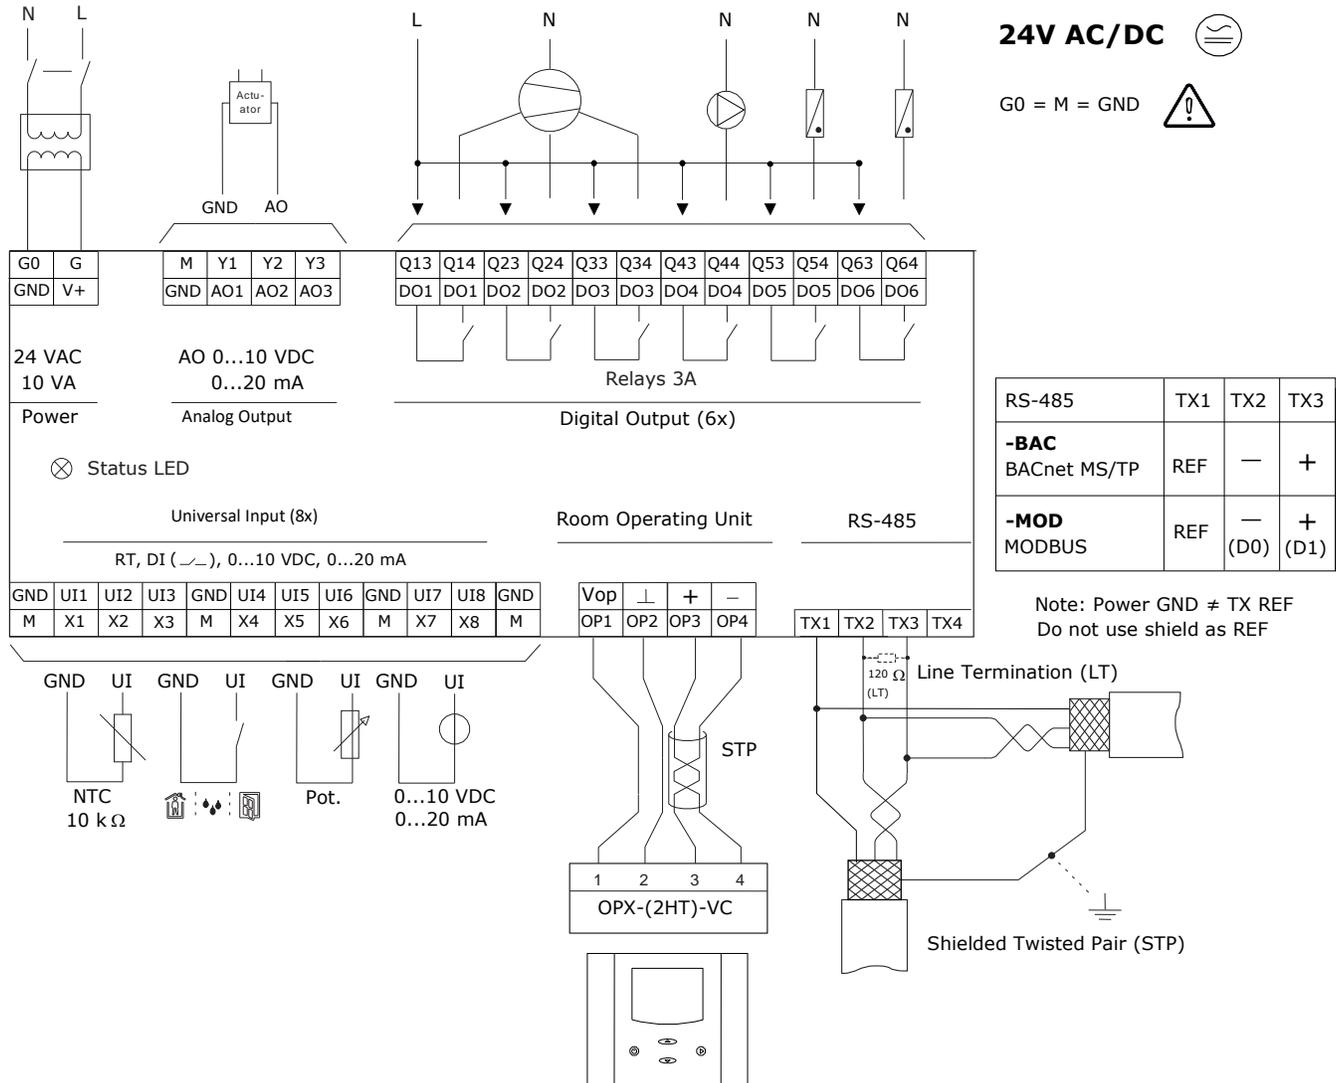


Configuration Jumpers

The inputs and outputs are configured with jumpers. Jumpers are located underneath the controller.

AO: Selection of analog output type

Left position:
 voltage output (0... 10 V)
factory default

Right position:
 current output (0... 20 mA)




UI: Selection of universal input type

Left position:
 voltage output (0... 10 V)
factory default

Middle position: current input (0... 20 mA)

Right position: RT or dry contact



LED-indicators

A status LED is located on the upper left side of the controller housing. During normal operation the LED blinks briefly once every 5 seconds. If there is an alarm or fault condition it will blink every second.

Installation

See installation sheet no:

- TCX2-40863 70-000599 (www.vectorcontrols.com)

X2 Functional Scope

The controller has the following X2 functions and elements:

Group	Modules	QTY	Description
UP			User and display parameters
UI	01U to 08U	8	Universal inputs, selectable with jumper: RT/DI, mA, VDC
	09U to 12U	4	Virtual inputs for operation terminals, bus modules or special functions
AL	1AL to 8AL	8	Alarm conditions
LP	1L to 4L	4	Control loops
Ao	1A to 3A	3	Analog outputs, selectable with jumper: mA, VDC
FAN	1F to 2F	2	Fan or lead lag modules, 1 to 3 fan speeds, up to 3 switching lead-lag stages each
do	1d to 6d	6	Binary outputs with a normally open (NO) relays contact
FU	1FU	1	Remote Enable: Activation of the controller based on signal and alarm conditions
	2FU	1	Change Operation Mode: Switching occupied and unoccupied with control signals
	3FU	1	Heat/Cool Change: Switching heating and cooling based on a control signal
	4FU	1	Setpoint Compensation: Summer/winter compensation of setpoint
	5FU	1	Economizer (free heating or cooling due to the condition of outside and room air)
Co			Communication (if a communication module is available)
COPY			Copying complete parameter sets between run, default and external memory with up to 4 memory locations (AEC-PM1)
RTC		1	Real time clock module with 48-hour power back up (keeps clock running during power failure)
PRO	Pr01 to Pr12	12	Time schedule programs for 7 days or annual switching events

Operation manual and configuration

This controller uses the latest generation X2 operating system. Detailed operating instructions for all devices equipped with this operating system can be downloaded here:

<http://www.vectorcontrols.com/products/x2>

Also available are programming instructions for technicians and an application database.

The device can be fully configured using EasySet.

EasySet may be downloaded free of charge from www.vectorcontrols.com.

**Efficient use of energy -
for a better future**

**Quality - Innovation - Partnership
Vector Controls GmbH**

Vector Controls LLC
17, Francis J. Clark Circle
Bethel, CT 06801
USA
info@vectorcontrols.com
www.vectorcontrols.com

