

A mm (inch)

60 (2.4)
60 (2.4)
31 (1.2)
10 (0.4)
50 (2.0)

B

No direct sunlight, no heat sources, no flammable materials, no sharp edges, no vibration.

C1

56 (2.2)
AMM-ED-W
1
2
3
4

C2

Push and ② pull to open

①
②
③

AMM-ED-W / Art.-No. 40-510086

88 (3.5)
88 (3.5)
56 (2.2)
56 (2.2)

D 24V AC/DC

24V AC/DC 10 VA Power
AO 0...10 VDC Analog Output (2x)
0...10 VDC Analog Input (1x)
Relays 2A Digital Output (2x)
RT/DI Passive Input (2x)
NTC 10k Ω

Line Termination (LT)
120Ω (LT)
Shielded Twisted Pair (STP)
COM -MOD/-BAC RS485


i -MOD, -BAC

GND	V+	AO1	AO2	+	-	REF
1	2	3	4	5	6	7


8	9	10	11	12	13	14
UI4	UI5	UI6		DO1	DO2	DO

6 (0.02)


i Load Configuration to AEC-PM2

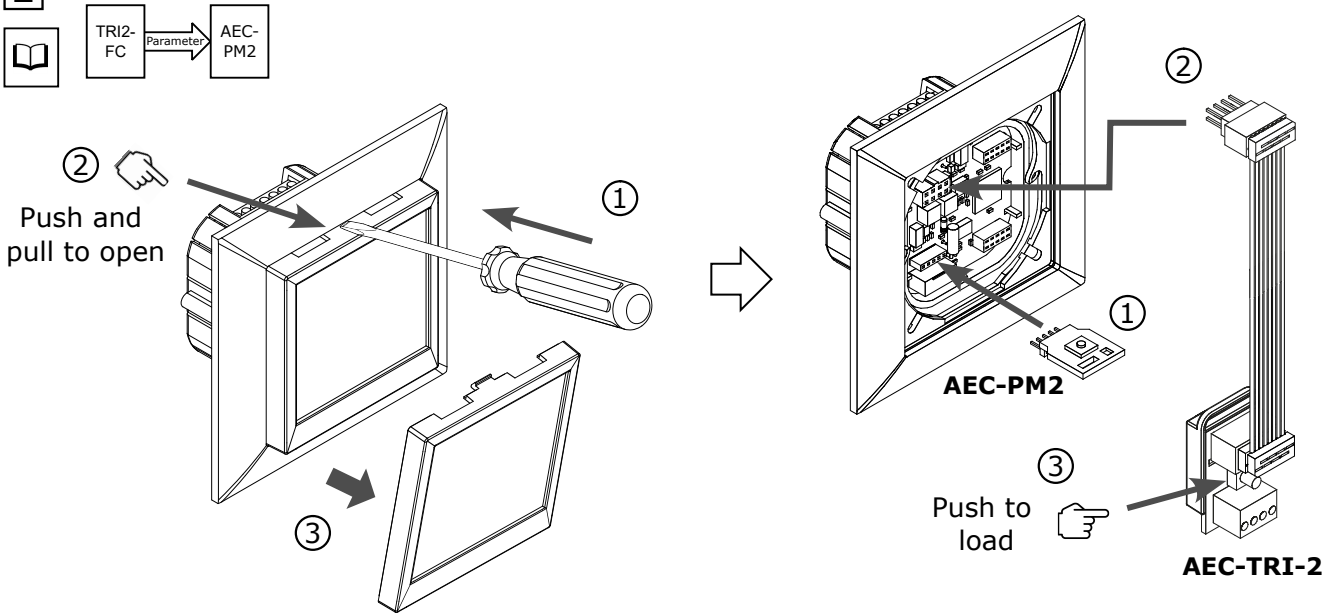

i Copy Configuration to TRI2

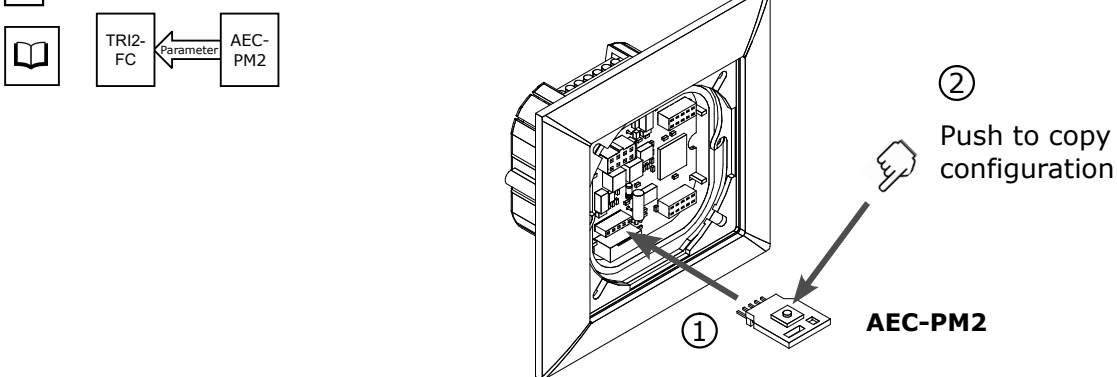

i Easyset

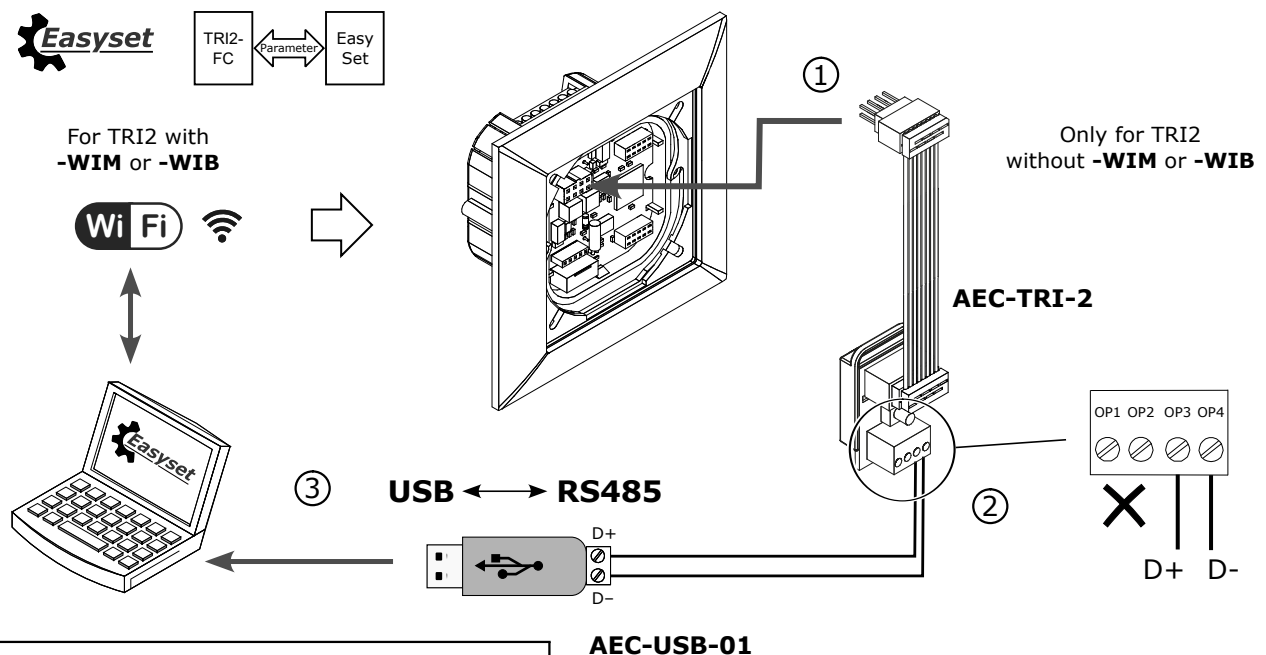

www.vectorcontrols.com

