TCY-MT-U Series PI-Temperature Controller

Features

- PI temperature control for HVAC systems
- Up to 2 modulating outputs 0–10 V DC with 10 mV resolution
- 1 internal temperature sensor and up to 2 external sensor inputs
- Remote control functions on the external input: heat/cool changeover, economy or off mode, external control sensor
- Password-protected user and control parameters
- Blue backlight



Applications

- Temperature control in heating, ventilation and air conditioning
- Stand-alone VAV control with pressure-independent actuators
- Water-only systems: radiators, floor heating or chilled ceilings
- Individual room control in offices, homes, hotel rooms and meeting rooms

General description

The TCY-MT-U is a stand-alone electronic temperature controller with one control loop and up to 2 PI sequences. It has 1 internal NTC temperature sensor, up to 2 external sensor inputs and up to 2 analog outputs (0–10 V). The configuration is kept to a minimum for simple, off-the-shelf use; for more advanced functions and current inputs or outputs, the TCI range is recommended. It is configured with the standard operation terminal; no special tools or software are required.

Name

T C Y - M T 2 - (U)

Housing:	U	= Vertical (2x4”) housing, Standard is square housing
Function:	2	= 2 = 2-Pipe, 4 = 4-Pipe
Input:	T	= Temperature, H = Humidity
Output:	M	= Modulating, B = Binary
Series:	**TCY**	

Ordering

Item Name	Item code	Control Type	Key-data
TCY-MT2-U-W01	40-10 0044-01	Cooling only	Compact PI controller with: 2 TI, 1 AO
TCY-MT2-U-W02	40-10 0044-02	Heating only	
TCY-MT2-U	40-10 0044	2-Pipe system	
TCY-MT4-U	40-10 0046	4-Pipe system	1 TI, 2 AO
Accessories			
S-Tn10-2	40-20 0001	Flying lead sensor with 6 ft cable	
SD-Tn10-12-2	40-20 0002	Flying lead duct sensor 4.7-inch immersion depth, 6 ft. cable	
SD-Tn10-20-2	40-20 0003	Flying lead duct sensor 7.8-inch immersion depth, 6 ft. cable	
SDB-Tn10-12-1	40-20 0124	Duct sensor with housing, 4.7-inch immersion depth	
SDB-Tn10-20-1	40-20 0133	Duct sensor with housing, 7.8-inch immersion depth	
SOA-Tn10	40-20 0006	Outdoor sensor	


© Vector Controls LLC, USA
www.vectorcontrols.com

Technical specifications

Caution! This device is intended to be used for comfort applications. Where a device failure endangers human life and/or property, it is the responsibility of the owner, designer and installer to add additional safety devices to prevent or detect a system failure caused by such a device failure. Vector Controls or its affiliates cannot be held liable for any damage caused by such a failure. Failure to follow specifications and local regulations may endanger life, cause equipment damage and void warranty.


Power Supply	Operating Voltage	24V AC/DC ± 10 %, 50/60 Hz, Class II, 48VA max
	Power Consumption	Max. 1.5 VA
	Electrical Connection	Terminal Connectors, wire 0.34-2.5 mm^2 (AWG 24…12)
Signal inputs	Temperature Input	
	Range	0-50 °C (32-122 °F)
	Accuracy	0.5 K
Signal outputs	Analog Outputs	AO1, For TCY-MT4-U AO2
	Output Signal	DC 0-10 V
	Resolution	9.76 mV (10 bit)
	Maximum Load	10 mA
Environment	Operation	To IEC 721-3-3
	Climatic Conditions	class 3 K5
	Temperature	0-50 °C (32-122 °F)
	Humidity	<95 % r.H. non-condensing
	Transport & Storage	To IEC 721-3-2 and IEC 721-3-1
	Climatic Conditions	class 3 K3 and class 1 K3
	Temperature	-25-70 °C (-13-158 °F)
	Humidity	<95 % r.H. non-condensing
	Mechanical Conditions	class 2MT2
Standards	CE conform according to EMC Standard 89/336/EEC EMEI Standard 73/23/EEC	EN 61 000-6-1/ EN 61 000-6-3
	Product standards	
	Automatic electrical controls for household and similar use	EN 60 730 –1
	Special requirement on temperature dependent controls	EN 60 730 – 2 – 9
	Degree of Protection	IP30 to EN 60529
	Safety Class	III (IEC 60536)
General	Cover, back part	Fire proof ABS plastic (UL94 class V-0)
	Mounting Plate	Galvanized Steel
	Dimensions (H x W x D)	Front part: 112 x 73 x 15 mm (4.4” x 2.9” x 0.6”) Power case: ø 58 x 32 mm (ø 2.3” x 1.3”)
	Weight (including package)	270 g (9.5 oz)

Dimensions [mm] (inch)

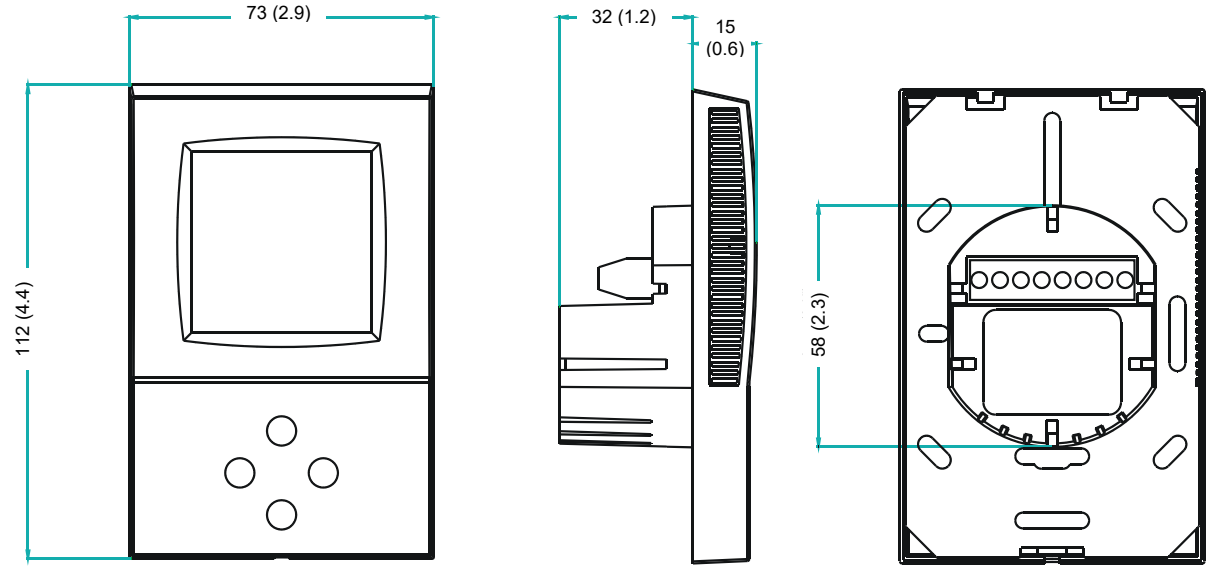

© Vector Controls LLC, USA
www.vectorcontrols.com

Connection diagram

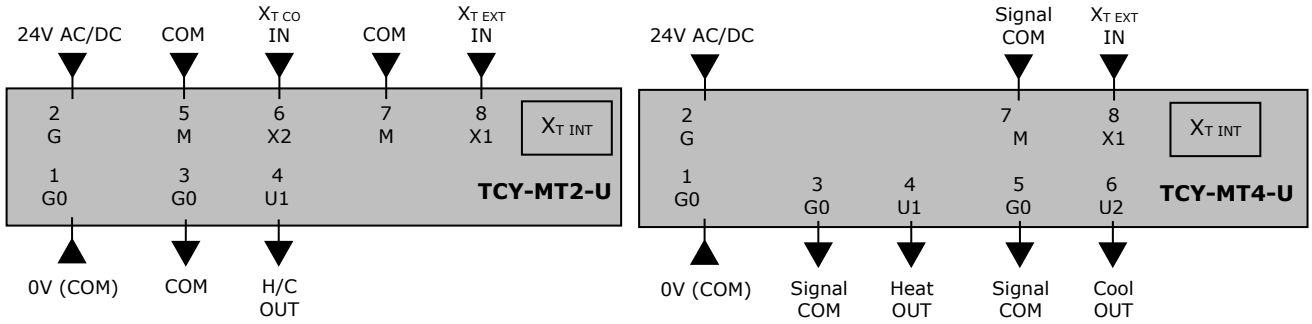

Description:

G0	Power supply:	0V, -24VDC, internally connected to signal common
G	Power supply:	24VAC, +24VDC
M	Signal common:	Common 0 potential for analog inputs and analog outputs.
X1	External temperature input:	NTC 10kΩ @ 25°C (77°F)

TCY-MT2-U:

X2	Changeover input:	NTC 10kΩ @ 25°C (77°F)
U1	Analog output:	0…10 V DC

TCY-MT4-U:

U1	Analog heating output:	0…10 V DC
U2	Analog cooling output:	0…10 V DC

Selection of actuators and sensors

Temperature sensors:

Use only our approved NTC sensors to achieve maximum accuracy. Recommended is SDB-Tn10-20 as Duct sensor, SRA-Tn10 as Room sensor and SDB-Tn10-20 with AMI-S10 as immersion sensor.

Modulating actuators:

Choose actuators with an input signal type of 0–10V DC or 2–10V DC.

Mounting and installation

Mount the controller on an interior wall, approx. 1.5 m above the floor, in a place with average room temperature. Avoid direct sunlight, heat sources, doors, outside walls and air outlets. The location is less critical if an external temperature sensor is used.
Mount and connect the controller as shown in the installation sheet supplied with the device, and wire it according to the connection diagram above.

© Vector Controls LLC, USA
www.vectorcontrols.com

Smart Sensors and Controls Made Easy!

Quality - Innovation – Partnership

Vector Controls LLC
USA

infous@vectorcontrols.com
www.vectorcontrols.com

© Vector Controls LLC, USA
www.vectorcontrols.com